JS3000 PRODUCT PROFILE





The JumpSurge 3000 is a 3000 Peak Amp jumpstarting tool and power bank for vehicles on and off the road. This device supports vehicles with 12V batteries on up to 9L gas engines and 7L diesel engines.

Capable of 45 jump starts on a single charge, the JS3000 is a robust and powerful tool capable of bringing a battery "back to life" in only 1 second.

Its multiple protection systems and fast charging capability keep you ready for anything, no matter where you go or what you drive.

Specs

| Peak Amps | 3000A | |
|----------------------------|---|--|
| Capacity (mAh) | 24000mAh/88.8Wh | |
| Start-up Capacity | 9L Gas 7L Diesel | |
| Input | TypeC: PD45W: 5V3A,9V3A,12V3A,15V3A | |
| Output | TypeC: PD45W: 5V3A,9V3A,12V3A,15V3A,20V2.25A USB1: QC18W 5V/3A, 9V/2A, 12V/1.5A USB2: 5V/2A DC: 10A Max 16.8V | |
| Button on the Jump Starter | Power Button*1 BOOST*1 | |
| Length of Clamp Cable | Positive: 250mm Negative: 200mm | |
| Protections | Short Circuit Protection, Over Current Protection, Reverse Polarity Protection, Reverse Charge Protection, Over Temperature Protection, Over Discharge Protection | |

ROAR BACK TO LIFE IN A SECOND WITH COLOSSA! POWER

TOPDUN

Use the 3000 Peak cranking amps to give lifesaving jumps in 1 second. The 24000mAh battery capacity can store up to 45 jumps. Revive up to 9L gas vehicles and 7L diesel vehicles.



POWER YOUR ESSENTIAL DEVICES

The JS3000 serves as a power bank with USB Quick Charge 3.0 port, supporting 5V/3A, 9V/2A, &12V/1.5A.

Its type C bidirectional charging includes PD45W output, PD45W input, and provides fast charging for devices that support PD protocol, such as laptops, cell phones, and more.

RUGGED ESIGN & PARTS

Sturdy outer housing makes it resistant to water, dust, and wear. Its high-quality internal structure design and circuitry keep the JS3000 going whether the temperature's -4F° or 140F° (-20°C or 60°C).

LED FLASHLIGHT


TOPDUN

The JS3000 is more than a Jump Starter! It's 400 lumens flashlight brings day to the dark.
Use the SOS setting to signal for help in emergencies. It's truly an essential travel gadget.

INNOVATIVE STOP SPARKTM SENSORS-SECURITY EXPERTS

TOPDUN

TOPDON's JS3000 has an innovative Stop Spark Sensor that suspends its use after too many jumps in a 10 minutes period. This prevents overheating, damage to the battery, and rejects sparks, protecting you and your vehicle.

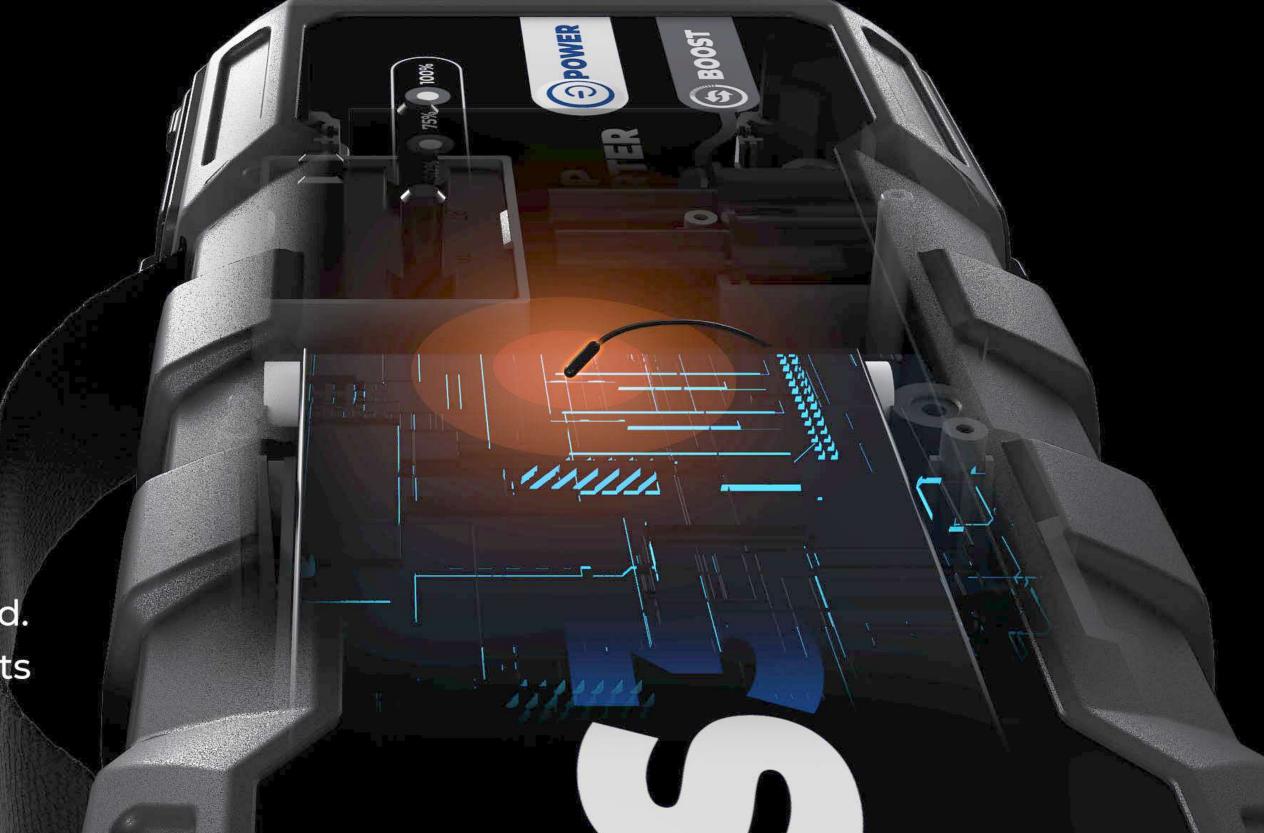

SMART PROTECTION FEATURES PREVENT 7 SERIOUS HAZARDS

TOPDUN

Reverse Polarities

Short Circuits

Over Currents


Reverse Charges

Over Discharges

Overheating

Low Temperatures

The JS3000 Energizes Almost Any Battery

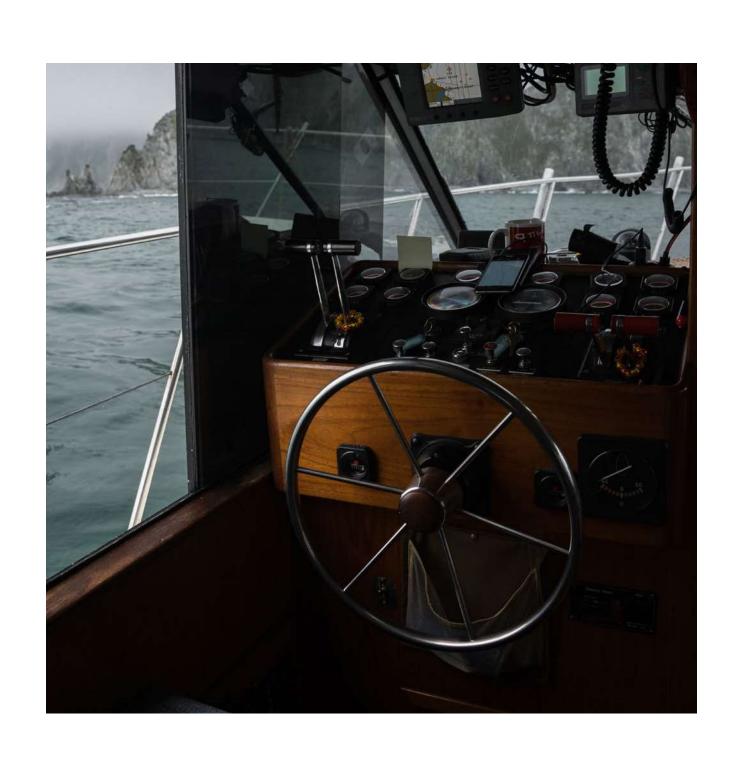





TOPDUN

WHAT'S IN THE BOX?

JS 3000 User Manual Ethylene Vinyl Acetate Carrying Bag Battery clamps The adapter USB Cable



| Model Specifications | JS1200 TOPDEN STATER STATER | JS2000 JUMP STARTER JERGE JS2000 JUMP STARTER | JS3000 TOPDON DIMP STARTER DOWNSTARTER DO |
|----------------------------|--|--|--|
| Peak Amps | 1200A | 2000A | 3000A |
| Capacity (mAh) | 10000mAh/37Wh | 16000mAh/59.2Wh | 24000mAh/88.8Wh |
| Start-up Capacity | 6.5L Gas 4L Diesel | 8L Gas 6L Diesel | 9L Gas 7L Diesel |
| Input | Type C:QC3.0 5V_3A/9V_2A | Type C:QC3.0 5V_3A/9V_2A | TypeC: PD45W: 5V3A,9V3A,12V3A,15V3A |
| Output | USB1: QC18W 5V/3A, 9V/2A,12V/1.5A; USB2: 5V/2A; DC: 10A Max 16.8V | USB1: QC18W 5V/3A, 9V/2A, 12V/1.5A; USB2: 5V/2A; DC: 10A Max 16.8V | TypeC: PD45W: 5V3A,9V3A,12V3A,15V3A, 20V2.25A; USB1: QC18W 5V/3A, 9V/2A, 12V/1.5A; USB2: 5V/2A; DC: 10A Max 16.8V |
| Button on the Jump Starter | Power Button*1 | Power Button*1 | Power Button*1 BOOST*1 |
| Button on the Clamp | BOOST*1 on the Clamp | BOOST*1 on the Clamp | |
| Length of Clamp Cable | Positive: 250mm Negative: 200mm | Positive: 250mm Negative: 200mm | Positive: 250mm Negative: 200mm |
| Protections | Short Circuit Protection, Over Current Protection, Reverse Polarity Protection, Reverse Charge Protection, Over Temperature Protection, Over Discharge Protection | Short Circuit Protection, Over Current Protection, Reverse Polarity Protection, Reverse Charge Protection, Over Temperature Protection, Over Discharge Protection | Short Circuit Protection, Over Current Protection, Reverse Polarity Protection, Reverse Charge Protection, Over Temperature Protection, Over Discharge Protection ₁₃ |

CONTACT US FOR MORE DETAILS

www.topdon.com
sales@topdon.com
support@topdon.com
Social Media: @topdonofficial

+1-833-629-4832(North America)

+86-755-21612590

CHINA TOPDON HQ

Unit 2005 20/F,No,3040 xinghai Avenue, Qianhai Shimao Tower, Qianhai Shenzhen-Hongkong Cooperation Zone,Shenzhen, PR, China 518000

USA TOPDON HQ

400 Commons Way, Suite A Rockaway, NJ 07856

